


Digital thermoanemometer FVAD 35 THx with ALMEMO® D6 plug with integrated atmospheric pressure sensor, for automatic pressure compensation

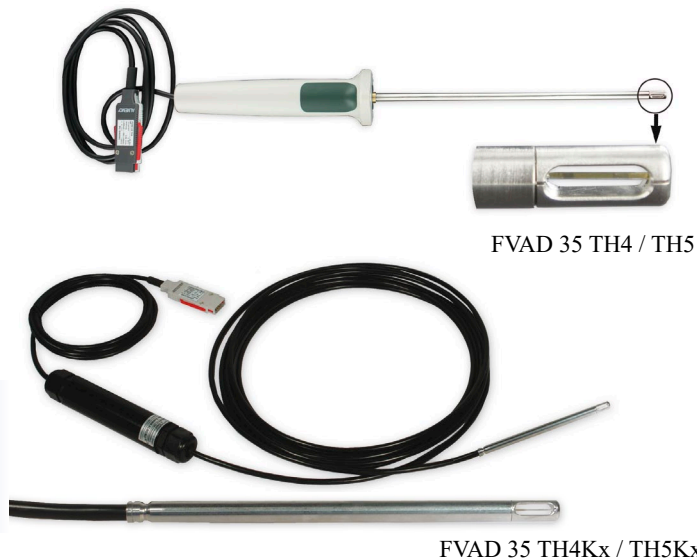

- Automatic atmospheric pressure compensation is provided for pressure-dependent flow velocity by means of a digital atmospheric pressure sensor integrated in the ALMEMO® D6 plug itself.
- Digital thermoanemometer with A/D converter in the grip or integrated in the cable
- The probe tube has a small diameter, only 6 mm.
- All relevant measurable variables can be measured using just one sensor.
- Three measuring channels are programmed (at our factory): Temperature (°C, t), Flow velocity (m/s, v), Atmospheric pressure (mbar, AP, p)

General features and accessories, ALMEMO® D6 sensors: see page 01.08

DAkKS or factory calibration KV90xx air flow for digital sensor (see chapter „Calibration certificates“). DAkKS calibration meets all the requirements regarding test resources laid down in DIN EN ISO/IEC 17025.

Technical data

Digital thermoanemometer (Sensor including A/D converter)

Flow	
Measuring range	
FVAD 35 TH4 / TH4Kx	0.08 to 2 m/s
FVAD 35 TH5 / TH5Kx	0.2 to 20 m/s
Resolution	
FVAD 35 TH4 / TH4Kx	0.001 m/s
FVAD 35 TH5 / TH5Kx	0.01 m/s
Response time	<1.5 seconds
Accuracy	
FVAD 35 TH4 / TH4Kx	± (0.04 m/s +1% of meas. val.)
FVAD 35 TH5 / TH5Kx	± (0.2 m/s +2% of meas. val.)
Nominal conditions	22 °C ±2 K, 45 % RH ±10 % RH 1013 mbar
Temperature compensation	0 to +50 °C
Influence of temperature	
FVAD 35 TH4 / TH4Kx	±0.5 % of measured value /°C at 0.3 to 2 m/s
FVAD 35 TH5 / TH5Kx	±0.3% of measured value /°C at 0.3 to 20 m/s
Incidental flow	bidirectional
Angle dependence	<3% of measured value with deviation <15°
Pressure range	Ambient pressure
Pressure compensation	automatic in range 700 to 1100mbar

Temperature	
Measuring range	-20 to +70 °C
Resolution	0.1 °C
Accuracy	±0.7 °C at 0 to 50 °C and >0.5 m/s
Response time T ₉₀	typical 10 seconds

Digital atmospheric pressure sensor

(integrated in ALMEMO® D6 plug)	
Measuring range	700 to 1100 mbar
Accuracy	±2.5 mbar (at 23 °C ±5 K)

ALMEMO® D6 plug

Refresh rate	0.5 seconds for all 3 channels
Supply voltage	6 to 13 VDC
Current consumption	40 mA

Dimensions

Probe diameter	6 mm
Flow aperture	approx. 10 x 3 mm
FVAD 35 TH4 / TH5	
Probe with grip, probe lengths 210 mm (plus grip) ALMEMO® cable 1.5 meters	
FVAD 35 TH4Kx / TH5Kx	
Probe with detached electronics unit integrated in the cable, Probe lengths THxK1, 80 mm / THxK2, 300 mm	
Probe cable 5 meters to the electronics	
ALMEMO® cable 1.5 m	

Accessories (for FVAD 35 THxK1 / K2 only)



Accessories	Order no.
Clamped screw connection with thread adapter for telescopic extension / extension set (maximum 80 °C)	ZV9915KV
Telescope extension Ø 15 to 24 mm 330 / 1010 mm	ZV9915TV
Extension set Ø 15 mm 4 x 255 mm	ZV9915VR3

Variants (including works certificate)

Digital thermoanemometer, fitted cable with ALMEMO® D6 plug and integrated digital atmospheric pressure sensor

Sensor 2 m/s, length = 210 mm, (with grip)	FVAD35TH4
Sensor 2 m/s, length = 80 mm, (detached electronics unit)	FVAD35TH4K1
Sensor 2 m/s, length = 300 mm, (detached electronics unit)	FVAD35TH4K2
Sensor 20 m/s, length = 210 mm, (with grip)	FVAD35TH5
Sensor 20 m/s, length = 80 mm, (detached electronics unit)	FVAD35TH5K1
Sensor 20 m/s, length = 300 mm, (detached electronics unit)	FVAD35TH5K2

Other designs are available on request

High-temperature thermoanemometer MT8635THx
Operative range -40 to +120 °C, up to 40 m/s
Probe with detached electronics unit integrated in the cable

